

- Use of non-lubricated air motors for low wear and long life time



Technical Data

Type	ESR 84-2700 AX25 WS
Article Nr.	60051315
Air supply	lubricated
Free speed	2700 min ⁻¹
Power	840 Watt
Radial deflection	-
Axial compliance	25 mm
Exhaust air	to front
ER collet	6 mm
Compliance force range	25 - 1000 N
Force of compliance max.*	- N
Direction of rotation	clockwise
Noise level	80 dB(A)
Air consumption	18.5 ls
Weight	6.90 kg
Connection air supply (hose) Ø inside outside	14 12
Accessories supplied	Wrench
All data related to 6.3 bar working pressure. Subject to technical alterations.	



Druckluftwerkzeuge | Druckluftmotoren

Accessories

Type	Article Nr.
Fork for quick change	60036025
Holder M14 x 2	60050383
Rotatable quick change chuck	60059055
Retainer 6mm QCC	60050245
Retainer 8mm QCC	60063535
Retainer 10mm QCC	60063545

Additional Images



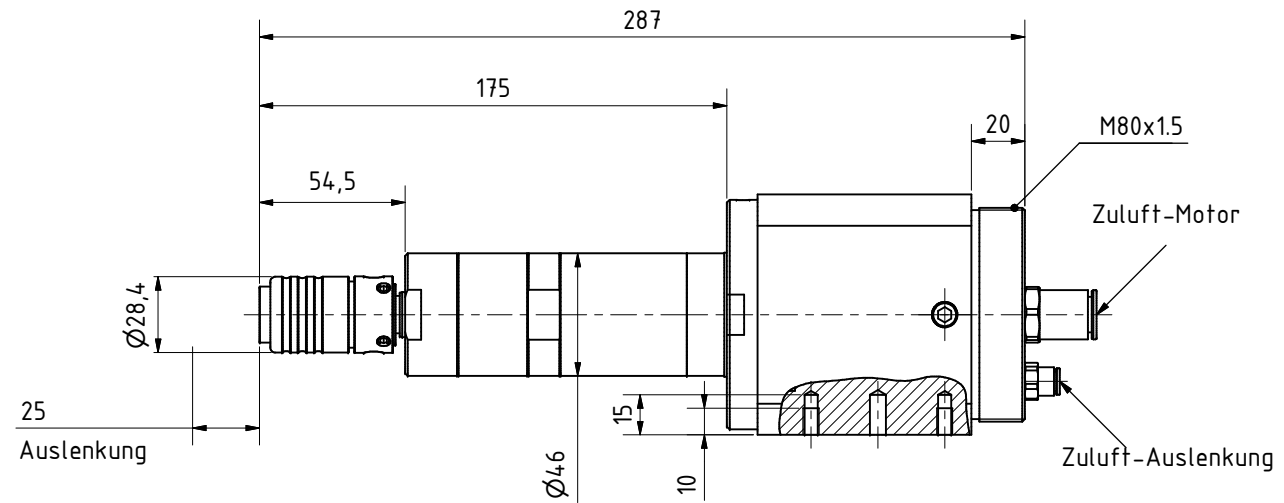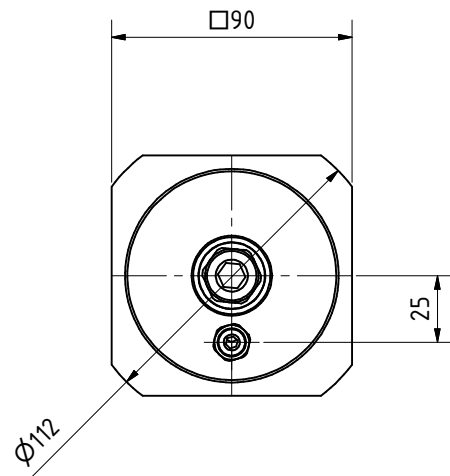

$\varnothing 6 -15$ TIEF
2x

Abluft

M6
4x

56

Abluft

25

10

50

287

175

54,5

$\varnothing 28,4$

25
Auslenkung

$\varnothing 46$

15

10

20

M80x1.5

Zuluft-Motor

Zuluft-Auslenkung

MANNESMANN DEMAG				Allgemein- toleranzen DIN ISO 2768-mH		Oberflächen DIN EN ISO 1302		Maßstab 2:1		ESR 84-2700 AX25 WS	
								Werkstoff			
					Datum	Name		Roboterspindel			
				gez.	21.04.2015	E.Koch					
				gepr.	21.04.2015	peskos					
								60051315			
								Blattformat A3			
								Blatt 2			
Zust.	Änd.-Nr.	Datum	Name					Ersatz für:			