

Druckluftwerkzeuge | Druckluftmotoren

- Use of non-lubricated air motors for low wear and long life time



Technical Data

Type	ESR 84-6000 AX25 WS
Article Nr.	60051295
Air supply	lubricated
Free speed	6000 min ⁻¹
Power	840 Watt
Radial deflection	-
Axial compliance	25 mm
Exhaust air	to front
ER collet	6 mm
Compliance force range	25 - 1000 N
Force of compliance max.*	- N
Direction of rotation	clockwise
Noise level	88 dB(A)
Air consumption	18.5 ls
Weight	6.90 kg
Connection air supply (hose) Ø inside outside	12 14
Accessories supplied	Wrench

All data related to 6.3 bar working pressure.
Subject to technical alterations.






Druckluftwerkzeuge | Druckluftmotoren

Accessories

Type	Article Nr.
Fork for quick change	60036025
Holder M14 x 2	60050383
Rotatable quick change chuck	60059055
Retainer 6mm QCC	60050245
Retainer 8mm QCC	60063535
Retainer 10mm QCC	60063545

Additional Images



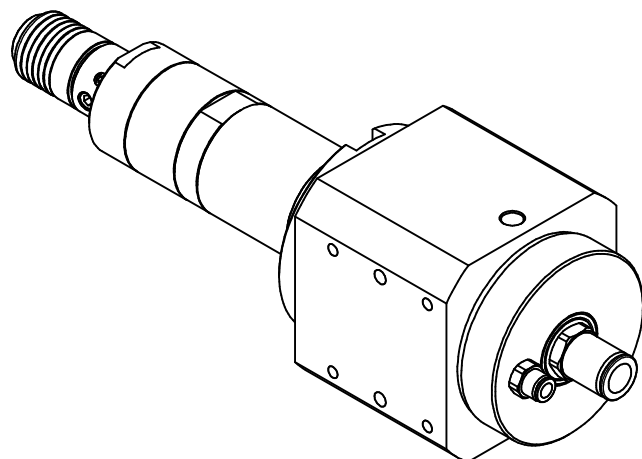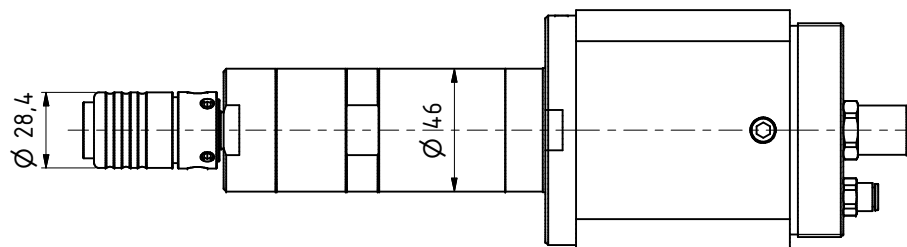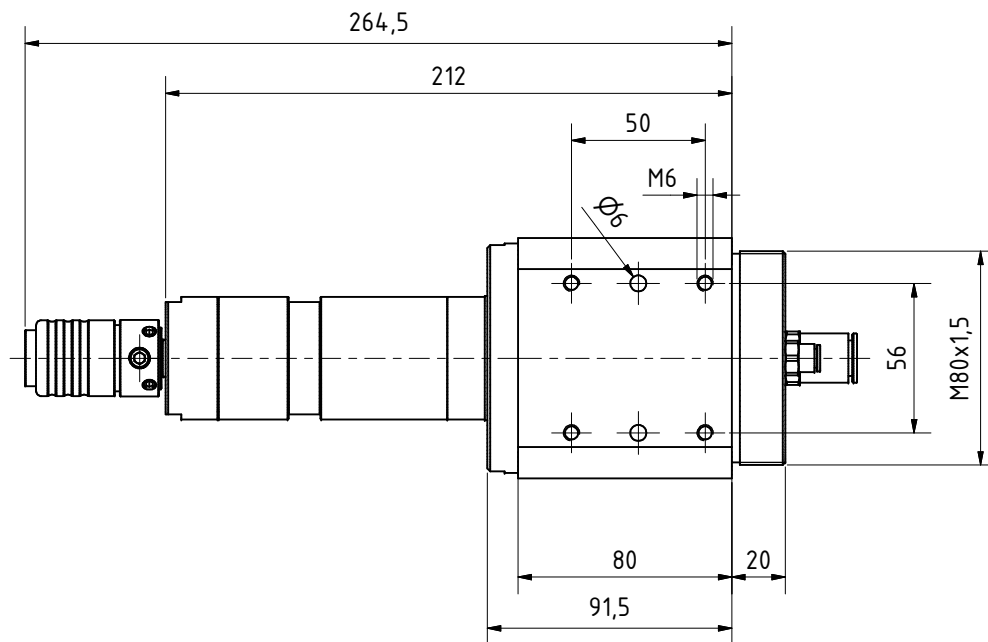

MANNESMANN DEMAG				Allgemein- toleranzen DIN ISO 2768-mH	Oberflächen DIN EN ISO 1302	Maßstab	1:2	ESR 84-3000 AX25 WS	
						Werkstoff			
					Datum	Name	Roboterspindel		
				gez.	06.03.2015	Peskos			
				gepr.	06.03.2015	Basyouni			
							60051295	Blattformat	
									A3
									Blatt 2
Zust.	Änd.-Nr.	Datum	Name				Ersatz für:		